

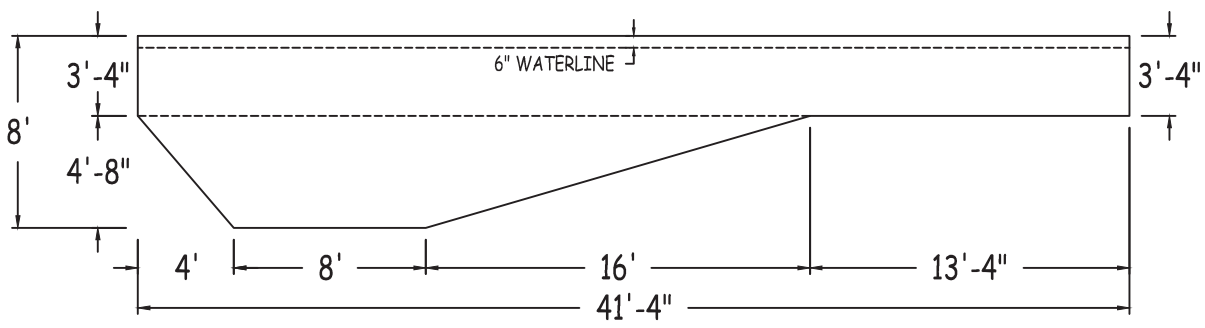


IN ACCORDANCE WITH ANSI/APSP/ICC-5 2011, THE INSTALLER IS RESPONSIBLE FOR PLACING ONE SKIMMER FOR EVERY 800 SQUARE FEET OF SURFACE AREA AND ONE RETURN FOR EVERY 300 SQUARE FEET OF SURFACE AREA.

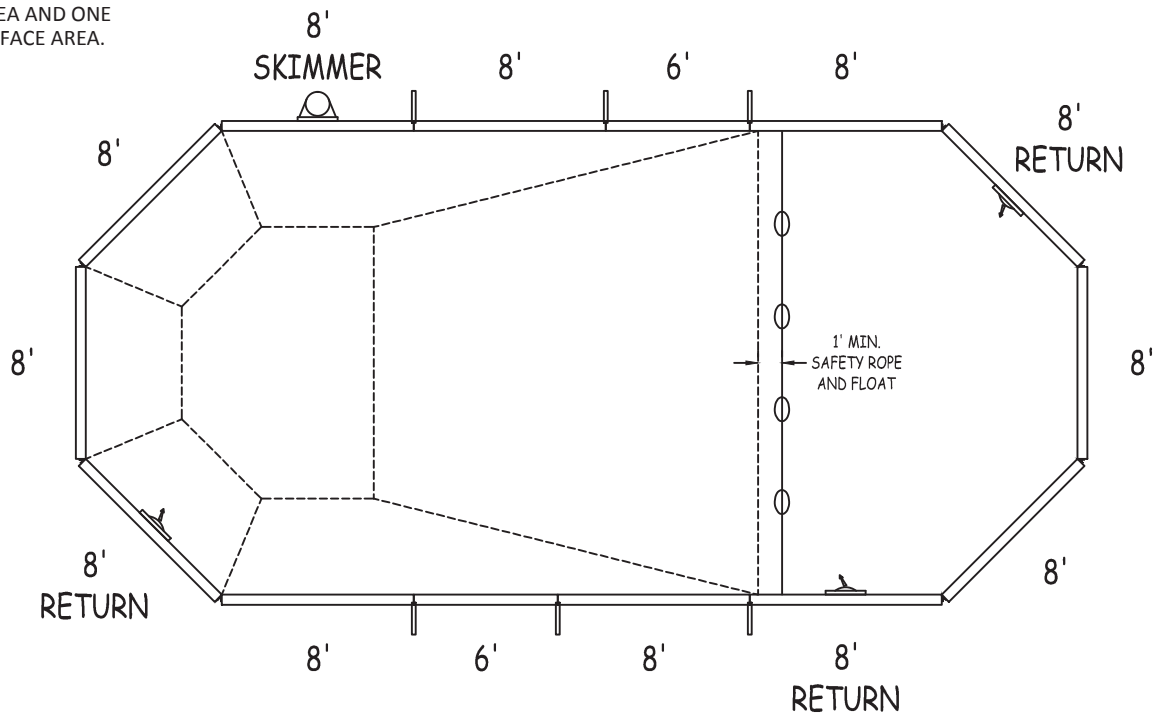


LATHAM STEEL		GRECIAN 19-4 X 41-4	
42" STEEL PANELS	PERIMETER: 108'-0"	VOLUME (US Gal):	24100
DWG#: LSSE00S1941-15	SURFACE (ft²): 734	VOLUME (Liters):	91200
KIT#: SE00S1941	LINER (ft²): 799	DATE: 1/1/2015	DSR: 122
	COVER (ft²): 924	SCALE: 1/8" = 1'-0"	

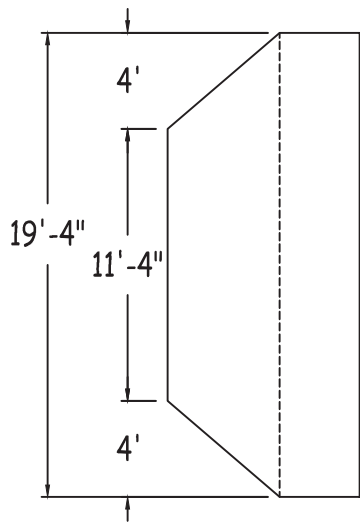


DIVING/SLIDING EQUIPMENT SHALL BE DESIGNED FOR SWIMMING POOLS AND SHALL BE INSTALLED IN ACCORDANCE WITH THE DIVING/SLIDING EQUIPMENT MANUFACTURER'S SPECIFICATIONS. PLEASE CONTACT THE DIVING/SLIDING EQUIPMENT MANUFACTURER FOR THEIR SPECIFICATIONS.

MEETS DEPTH AND SHAPE MINIMUM STANDARD ANSI/APSP/ICC-5 2011

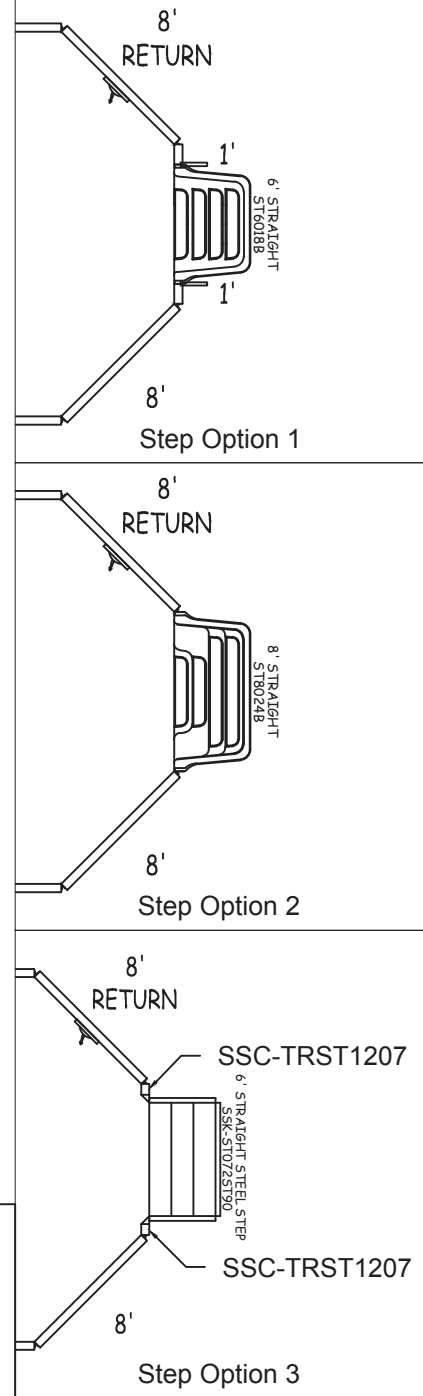

Diagonals		2 to 7	38'-2 1/4"
S1toS2	19'-3 3/4"	2 to 8	36'-1 1/4"
H1toH2	19'-3 3/4"	3 to 4	8'-0"
S1toH1	16'-0"	3 to 5	14'-9 1/2"
S2toH2	16'-0"	3 to 6	38'-2 1/4"
S1toH2	25'-1"	3 to 7	42'-1"
H1toS2	25'-1"	3 to 8	41'-3 3/4"
1 to 2	30'-0"	4 to 5	8'-0"
1 to 3	36'-1 1/4"	4 to 6	36'-1 1/4"
1 to 4	38'-2 1/4"	4 to 7	41'-3 3/4"
1 to 5	35'-8 1/4"	4 to 8	42'-1"
1 to 6	19'-3 3/4"	5 to 6	30'-0"
1 to 7	14'-9 1/2"	5 to 7	36'-1 1/4"
1 to 8	8'-0"	5 to 8	38'-2 1/4"
2 to 3	8'-0"	6 to 7	8'-0"
2 to 4	14'-9 1/2"	6 to 8	14'-9 1/2"
2 to 5	19'-3 3/4"	7 to 8	8'-0"
2 to 6	35'-8 1/4"		

Part number	Description	Base	Option 1	Option 2	Option 3
		QTY	QTY	QTY	QTY
ST0960002X	8'	8	7	7	7
ST0960002*	8' SKIMMER	1	1	1	1
ST0960002*	8' RETURN	3	3	3	3
ST0720001X	6'	2	2	2	2
ST0120000X	1'	-	2	-	-
SSC-TRST1207	12" Straight Transition	-	-	-	2
Brace	Brace	6	8	6	6
IPC-AB45	CONNECTOR CNR ANGLE 45D 42"	8	8	6	8
IPC-STKPK25	REBAR STAKE 18" 25PC	1	1	1	1
IPC-HDWSTRT150	BOLT STR 3/8-16X1" C/W NUT 150PC	1	1	1	1
IPC-HDW-PK45	BOLT 45DEG 3/8-16X1-1/2" 72PC	1	1	1	1
IPC-AB45-STP	CONNECTOR CNR ANGLE STEP 45D 42"	-	-	2	-
ST6018B	THKSHT STEP STR 6'	-	1	-	-
ST8024B	THKSHT STEP STR SIT N STEP 8'	-	-	1	-
SSK-ST072ST90	STEEL STEP STR-90D 3 TRD 6'	-	-	-	1

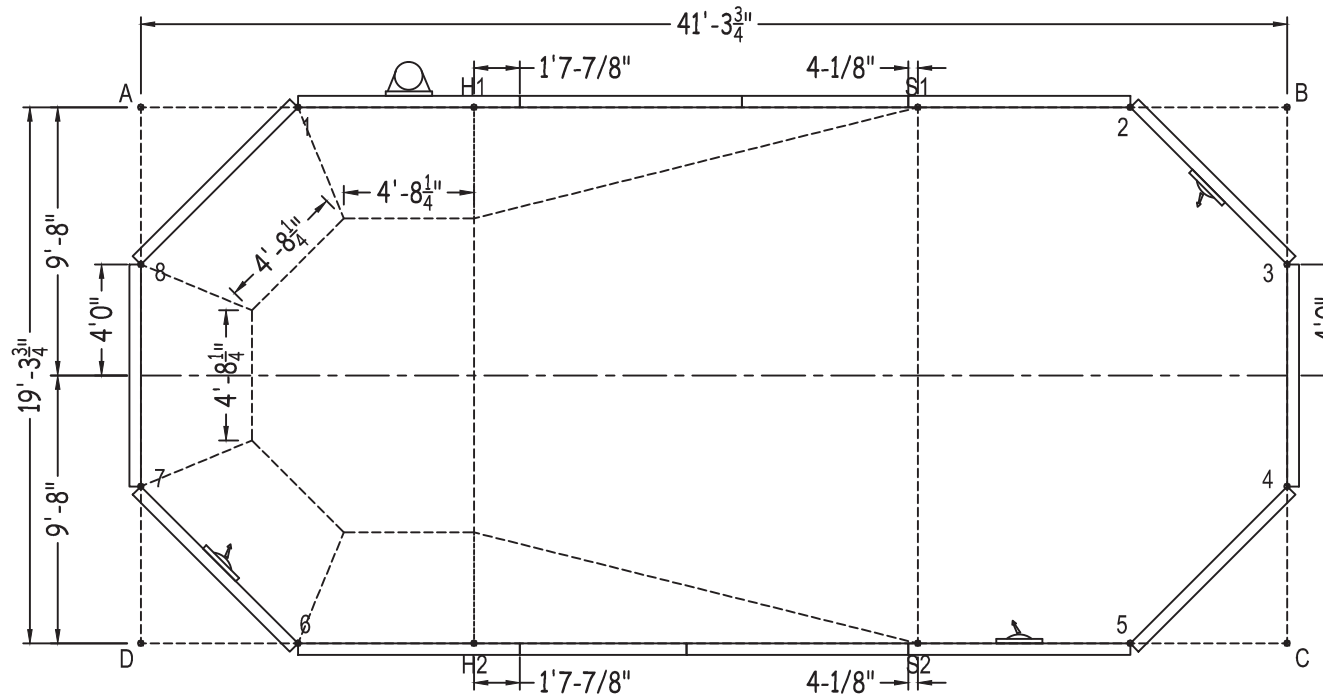

	A	B	C	D
1	5'-8"	35'-8"	40'-6 1/2"	20'-1 1/2"
2	35'-8"	5'-8"	20'-1 1/2"	40'-6 1/2"
3	41'-8 1/2"	5'-8"	13'-8"	43'-6 1/4"
4	43'-6 1/4"	13'-8"	5'-8"	41'-8 1/2"
5	40'-6 1/2"	20'-1 1/2"	5'-8"	35'-8"
6	20'-1 1/2"	40'-6 1/2"	35'-8"	5'-8"
7	13'-8"	43'-6 1/4"	41'-8 1/2"	5'-8"
8	5'-8"	41'-8 1/2"	43'-6 1/4"	13'-8"
S2	34'-1 1/4"	23'-5 1/2"	13'-3 3/4"	28'-0"
S1	28'-0"	13'-3 3/4"	23'-5 1/2"	34'-1 1/4"
H2	22'-8 3/4"	35'-1 1/4"	29'-3 3/4"	12'-0"
H1	12'-0"	29'-3 3/4"	35'-1 1/4"	22'-8 3/4"
A	-	41'-3 3/4"	45'-7 1/4"	19'-3 3/4"

GRECIAN 19-4 X 41-4

DWG #: LSSE00S1941-15

DATE: 1/1/2015

SHEET: 2 OF 2