



## Figure 4

- Tubing: 1.50" or 1.90" OD
- Wall Thickness\*: .049", .065", .109" or .145"
- Stainless Steel: 304 or 316L Marine Grade\*\* (add –MG to part number)
- Bends: 6" Radius
- Options: Powder-coating and SealedSteel Salt Friendly available
- Recommended Anchors: AS-200B for 1.50" and AS-100B for 1.90" (order separately)
- Recommended Escutcheons: EP-150 for 1.50" and EP-100F for 1.90" (order separately)
- Sold as pairs, unless otherwise noted

\* Minimum rail thickness – .049 for Residential, .065 for Commercial

\*\* Minimum requirement for salt pools is 316L Marine Grade


### Figure 4 (1.90" OD)

Part Number	Description	Weight	Height	Width	Depth
F4H-100	30" Figure 4, .065" wall	24 lbs	39"	32"	4"
F4H-101	30" Figure 4, .049" wall	19 lbs	39"	32"	4"
F4H-102	26" Figure 4, .049" wall	18 lbs	39"	32"	4"
F4H-102S	26" Figure 4, .049" wall – Single Rail	12 lbs	39"	32"	4"
10179	30" Figure 4, .065" wall	24 lbs	32"	4"	
10180	30" Figure 4, .109" wall	38 lbs	39"	32"	4"
10181	30" Figure 4, .145" wall	48 lbs	39"	32"	4"

### Figure 4 (1.50" OD)

Part Number	Description	Weight	Height	Width	Depth
12053	30" Figure 4, .120" wall	24 lbs	39"	32"	4"

F4H-100 & F4H-101

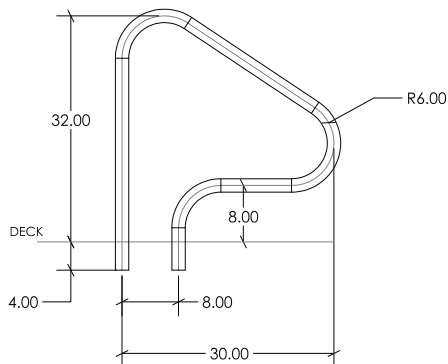

F4H-102

