

# in.touch 2

# Easily integrate your spa to the Internet of Things!



### Simplest of setups

in.touch 2 eliminates all the complexities of connecting your spa to the Internet and transforms your iOS or Android smartphone or tablet into your ultimate mobile remote control. in.touch 2 comes with state-of-the-art apps and 2 pre-paired radio frequency transmitters, one being part of your spa system and the second one being connected to your Internet router. Both RF transmitters are pre-linked to one another, enabling an immediate and perfect communication between you and your spa.

#### Strong and long range communication signal

Through their proprietary RF technology, in.touch 2 transceivers emit a strong, stable and long range signal

between your spa and your router (about 3 times longer than regular Wi-Fi signal). No need for repeaters or boosters: your spa will always remain within reach in typical backyard settings.

#### State-of-the-art apps with push notifications

in.touch 2 streamlined iOS and Android applications make it very easy to control and program all the functions and features of your spa from your smartphone or your tablet. Even when you're away from home, you get a full control of your water care settings, filtration cycles, water temperature, accessories and a lot more. Push notifications will always keep you informed on the status of your spa, even when your app is not open.



### simplest of setups

in.touch 2 eliminates all the complexities of connecting your spa to the Internet



## in.touch 2 ultimate mobile remote control for your spa

## strong and long range signal

in.touch 2 features proprietary RF technology

- long range up to 300 foot line of sight with normal housewall obstruction (about 3 times normal Wi-Fi signal)
- frequency of operation
   915MHz for North America
   and 868MHz for Europe
   (2 different models)
- compatible with X and Y series versions 2012 and earlier
- compatible internet RJ45
- NA Part ID: 0608-521023 0608-521020 (Gecko Depot)
- CE Part ID: 0608-521024 0608-521021 (Gecko Depot)

- operating temperature: -4°F (-20°C) to 140°F (60°C)
- storage temperature: -22°F (-30°C) to 185°F (85°C)
- UL & CSA certifications:

   UL 1563 Sixth Ed.
   UL file: E182156
   CAN/CSA C22.2 No. 218.1-13
   FCC part 15, subpart B
   ICES-003
- CEM Europe: IEC 60335-1 IEC 60335-2-60 EN 55014-1, EN 55014-2 EN 61000-3-2, EN 61000-3-3

### state-of-the-art in.touch 2 apps

with push notifications

- for iOS and Android smartphones and tablets
- instant spa status
- control of water temperature
- control of spa water care settings (economy & filtration)
  - away from home
  - beginner
  - energy saving
  - super energy
  - weekender
- push notifications

- system errors
- reminders
- accessories
  - pumps
  - lights
  - waterfallsblower
- message center
  - error message log






apple app store
android google play

### home transmitter

connected to your router with an Ethernet cable

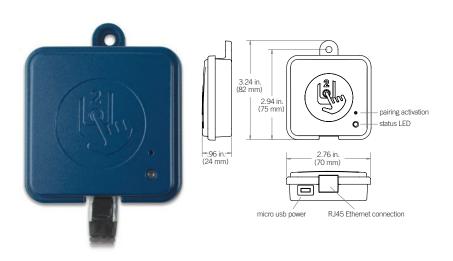

### spa transmitter

connected to your spa pack

