

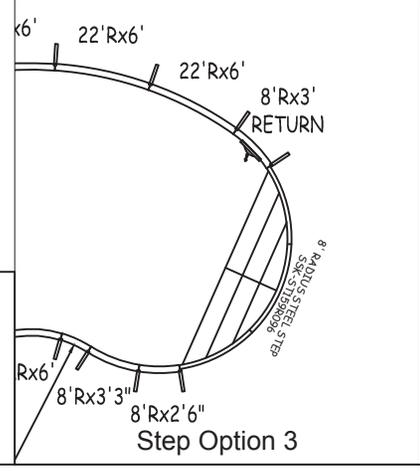
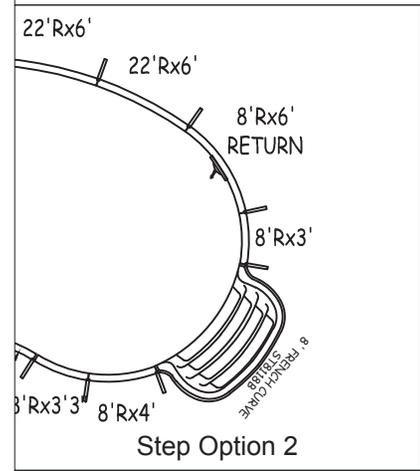
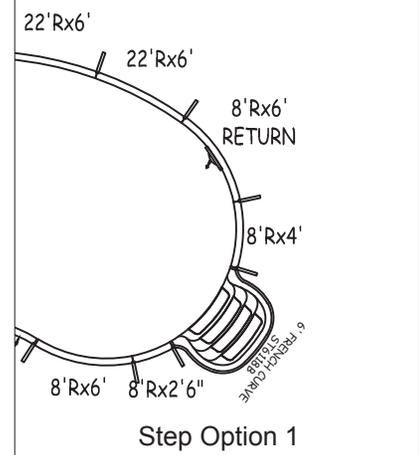
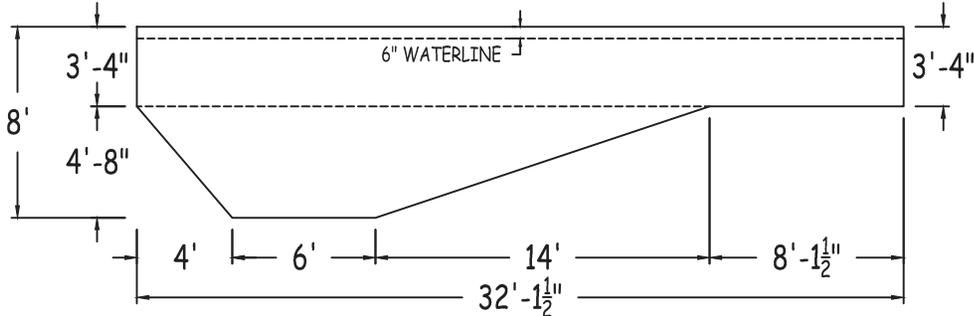


IN ACCORDANCE WITH ANSI/APSP/ICC-5 2011, THE INSTALLER IS RESPONSIBLE FOR PLACING ONE SKIMMER FOR EVERY 800 SQUARE FEET OF SURFACE AREA AND ONE RETURN FOR EVERY 300 SQUARE FEET OF SURFACE AREA.

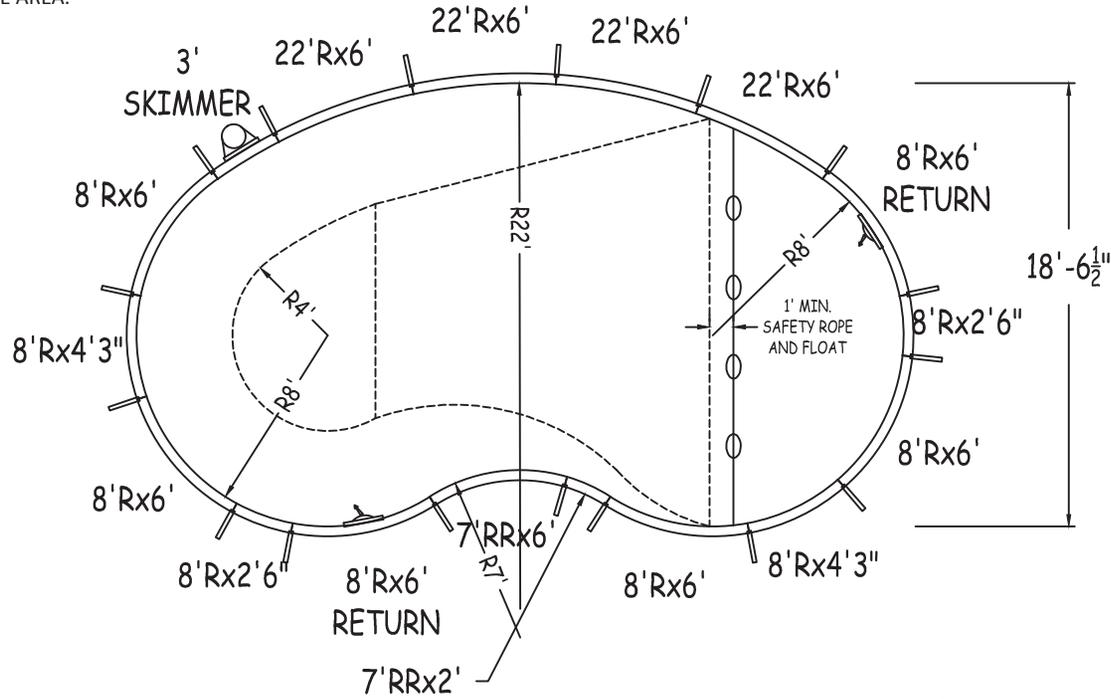

LATHAM STEEL		CRESCENT 16-0 x 18-7 x 32-2 LEFT			
42" STEEL PANELS	PERIMETER:	84'-6"	VOLUME (US Gal):	15700	
DWG#:	SURFACE (ft²):	477	VOLUME (Liters):	59400	
LSCR00S1632L15	LINER (ft²):	514	DATE:	1/1/2015	DSR: 138
KIT#:	COVER (ft²):	757	SCALE:	1/8" = 1'-0"	

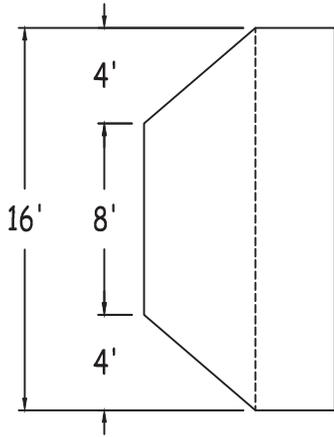

DIVING/SLIDING EQUIPMENT SHALL BE DESIGNED FOR SWIMMING POOLS AND SHALL BE INSTALLED IN ACCORDANCE WITH THE DIVING/SLIDING EQUIPMENT MANUFACTURER'S SPECIFICATIONS. PLEASE CONTACT THE DIVING/SLIDING EQUIPMENT MANUFACTURER FOR THEIR SPECIFICATIONS.


MEETS DEPTH AND SHAPE MINIMUM STANDARD ANSI/APSP/ICC-5 2011



SHEET: 1 OF 3

Center To Center	H1toH2	17'-5 1/2"	5 to10	16'-0"	7 to10	21'-1 3/4"
1 to 2	S1toH1	14'- 1/4"	5 to11	9'-6 3/4"	7 to11	29'-8 3/4"
1 to 3	S2toH2	14'-0"	6 to 7	11'-10 1/4"	8 to 9	9'-6 3/4"
1 to 4	S1toH2	21'-10 1/2"	6 to 8	20'-4"	8 to10	17'-1 1/4"
2 to 3	H1toS2	22'-6 3/4"	6 to 9	17'-5"	8 to11	29'-2"
2 to 4	5 to 6	14'-8 1/2"	6 to10	18'- 1/2"	9 to10	7'-6 3/4"
3 to 4	5 to 7	25'-4"	6 to11	21'-6 1/2"	9 to11	19'-10 1/2"
Diagonals	5 to 8	28'-10 1/4"	7 to 8	12'-7 1/4"	10to11	12'-7 1/4"
S1toS2	5 to 9	21'-1 3/4"	7 to 9	16'-0"		

Part number	Description	Base	Option 1	Option 2	Option 3
		QTY	QTY	QTY	QTY
RA0722642X	22'Rx6'	4	4	4	4
RA036SK30*	3' SKIMMER	1	1	1	1
RA0720961X	8'Rx6'	4	3	2	2
RA0720961*	8'Rx6' RETURN	2	2	2	1
RA0510961X	8'Rx4'3"	2	1	1	1
RA0480961X	8'Rx4'	-	1	1	-
RA0390960X	8'Rx3'3"	-	-	1	1
RA0360960X	8'Rx3'	-	-	1	-
RA0360960*	8'Rx3' RETURN	-	-	-	-
RA0300960X	8'Rx2'6"	2	2	1	2
RR0720841X	7'RRx6'	1	1	1	1
RR0240840X	7'RRx2'	1	1	1	1
Brace	Brace	17	17	17	16
IPC-STKPK25	REBAR STAKE 18" 25PC	2	2	2	2
IPC-HDWSTRT150	BOLT STR 3/8-16X1" C/W NUT 150PC	2	2	2	2
ST6118B	THKSH T STEP FRENCH CURVE 6'	-	1	-	-
ST8118B	THKSH T STEP FRENCH CURVE 8'	-	-	1	-
SSK-ST159R096	STEEL STEP RAD 3 TRD 13'3"X8'RA	-	-	-	1

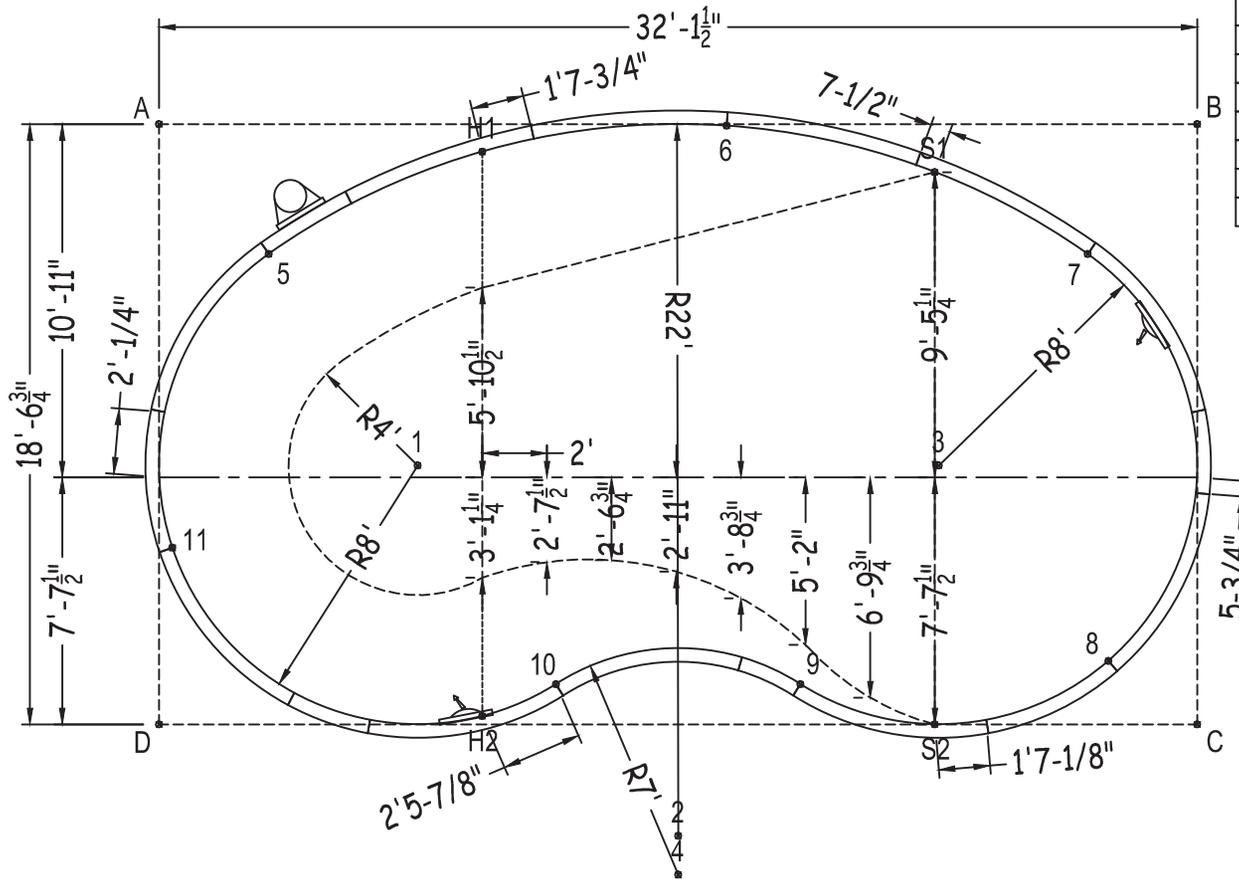

	A	B	C	D
1	13'-3"	26'-4"	25'-5"	11'-3 3/4"
2	27'-2 3/4"	27'-2 3/4"	16'-5 1/4"	16'-5 1/4"
3	26'-4"	13'-3"	11'-3 3/4"	25'-5"
4	28'-2 3/4"	28'-2 3/4"	16'-8 3/4"	16'-8 3/4"
5	5'-3"	29'-0"	32'-2 1/2"	14'-11 1/4"
6	17'-6 3/4"	14'-6 3/4"	23'-6 1/2"	25'-6"
7	29'-0"	5'-3"	14'-11 1/4"	32'-2 1/2"
8	33'-8 3/4"	16'-9 3/4"	3'-4 1/2"	29'-5 1/4"
9	26'-4"	21'-2 3/4"	12'-4 1/4"	19'-10 1/2"
10	21'-2 3/4"	26'-4"	19'-10 1/2"	12'-4 1/4"
11	13'-1 1/4"	34'-3 3/4"	32'-2"	5'-5 3/4"
S2	30'-4"	20'-3"	8'-1 1/2"	24'-0"
S1	24'- 1/2"	8'-3"	18'-11"	29'-5 1/2"
H2	20'-10 1/4"	28'-8 1/2"	22'-1 1/2"	10'-0"
H1	10'- 1/2"	22'-1 3/4"	28'-4"	20'-4"
A	-	32'-1 1/2"	37'-1 1/4"	18'-6 3/4"

CRESCENT 16-0 X 18-7 X 32-2 LEFT

DWG #: LSCR00S1632L15

DATE: 1/1/2015

SHEET: 2 OF 3

