


IN ACCORDANCE WITH ANSI/APSP/ICC-5 2011, THE INSTALLER IS RESPONSIBLE FOR PLACING ONE SKIMMER FOR EVERY 800 SQUARE FEET OF SURFACE AREA AND ONE RETURN FOR EVERY 300 SQUARE FEET OF SURFACE AREA.

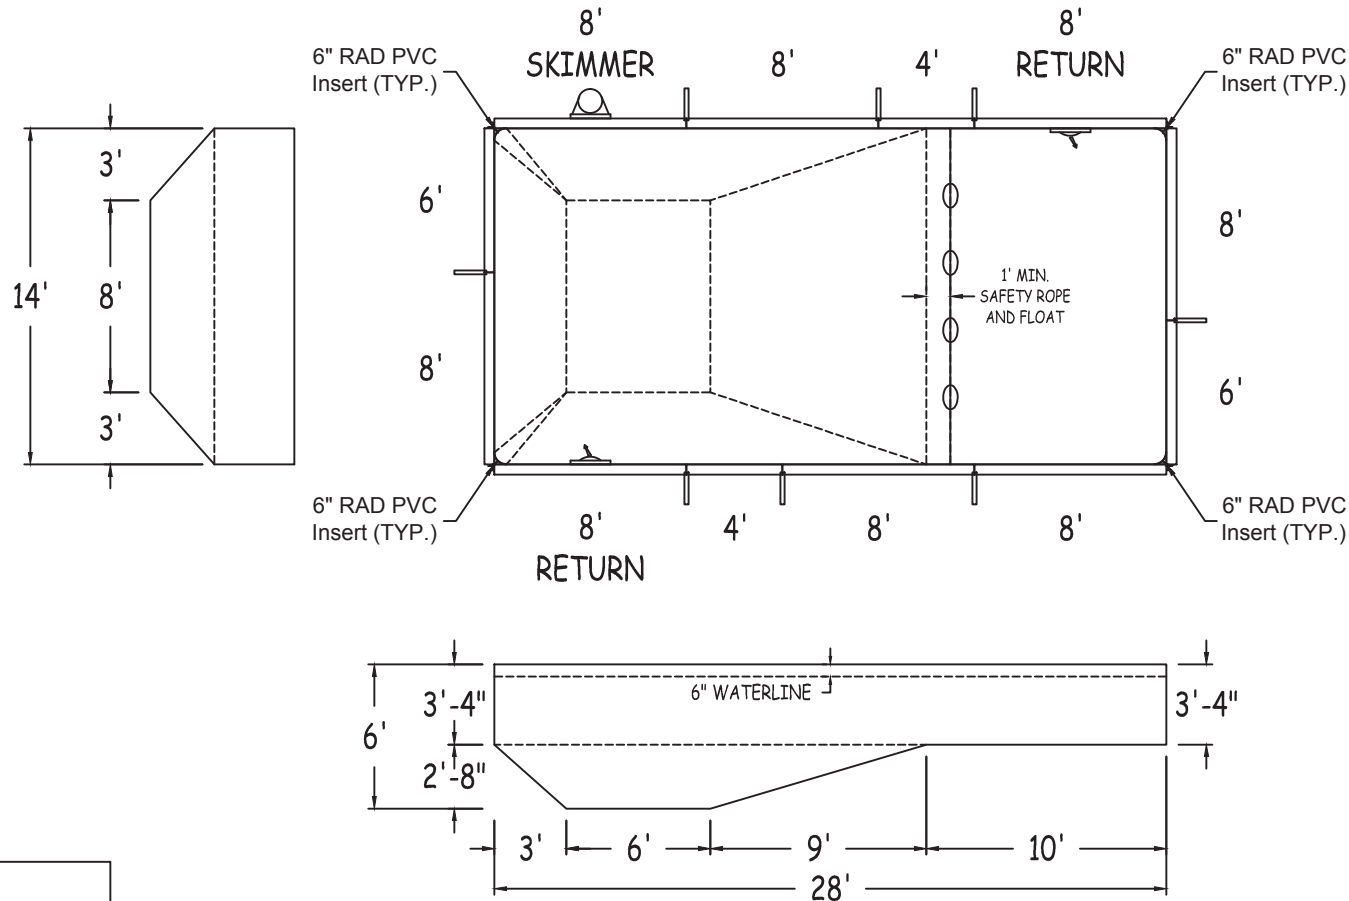

LATHAM STEEL

RECTANGLE-6IN RAD 14-0 X 28-0

42" STEEL PANELS

PERIMETER: 84'-0" VOLUME (US Gal): 10900

DWG#: LSRE06S1428-15

SURFACE (ft²): 392 VOLUME (Liters): 41200

KIT#: RE06S1428

COVER (ft²): 480 DATE: 1/1/2015 DSR: 111


RECTANGLE-6IN RAD



NON-DIVING POOL

USE OF DIVING EQUIPMENT IS PROHIBITED


MEETS DEPTH AND SHAPE MINIMUM STANDARD ANSI/APSP/ICC-5 2011

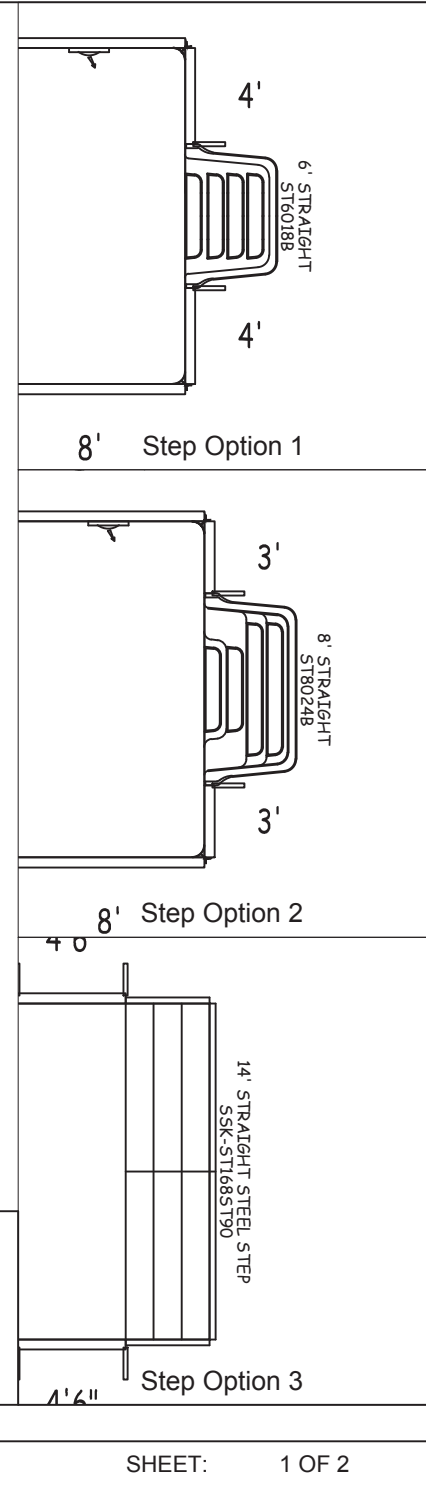

SHEET: 1 OF 2

Diagonals	
S1toS2	14'-0"
H1toH2	14'-0"
S1toH1	10'-0"
S2toH2	10'-0"
S1toH2	17'-2 1/2"
H1toS2	17'-2 1/2"
1 to 2	28'-0"
1 to 3	31'-3 3/4"
1 to 4	14'-0"
2 to 3	14'-0"
2 to 4	31'-3 3/4"
3 to 4	28'-0"

Part number	Description	Base	Option 1	Option 2	Option 3
		QTY	QTY	QTY	QTY
ST0960002X	8'	5	4	4	2
ST0960002*	8' SKIMMER	1	1	1	1
ST0960002*	8' RETURN	2	2	2	2
ST0720001X	6'	2	1	1	1
ST0540001X	4'6"	-	-	-	2
ST0480001X	4'	2	4	2	2
ST0360000X	3'	-	-	2	-
Brace	Brace	8	9	9	9
IPC-AB90	CONNECTOR CNR ANGLE 90D 42"	4	4	4	2
IPC-AB90-INS6R	CORNER INSERT 6" RAD PVC 42"	4	4	4	2
IPC-STKPK25	REBAR STAKE 18" 25PC	1	1	1	1
IPC-HDWSTRT150	BOLT STR 3/8-16X1" C/W NUT 150PC	1	1	1	1
ST6018B	THKSHT STEP STR 6'	-	1	-	-
ST8024B	THKSHT STEP STR SIT N STEP 8'	-	-	1	-
SSK-ST168ST90	FE STEEL STEP STR-90D 3 TRD 14'	-	-	-	1

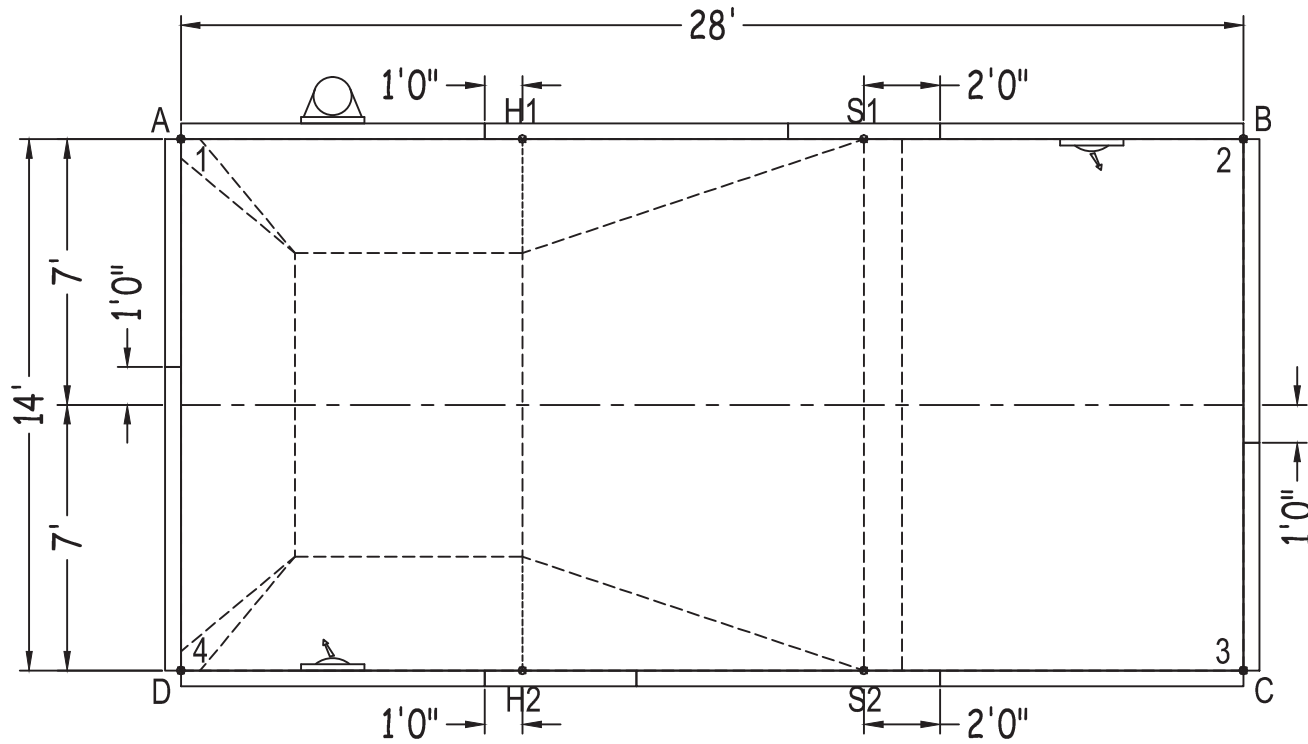

	A	B	C	D
1	0"	28'-0"	31'-3 3/4"	14'-0"
2	28'-0"	0"	14'-0"	31'-3 3/4"
3	31'-3 3/4"	14'-0"	0"	28'-0"
4	14'-0"	31'-3 3/4"	28'-0"	0"
S2	23'-7 1/4"	16'-7 3/4"	9'-0"	19'-0"
S1	19'-0"	9'-0"	16'-7 3/4"	23'-7 1/4"
H2	16'-7 3/4"	23'-7 1/4"	19'-0"	9'-0"
H1	9'-0"	19'-0"	23'-7 1/4"	16'-7 3/4"
A	-	28'-0"	31'-3 3/4"	14'-0"

RECTANGLE-6IN RAD 14-0 X 28-0

DWG #: LSRE06S1428-15

DATE: 1/1/2015

SHEET: 2 OF 2