
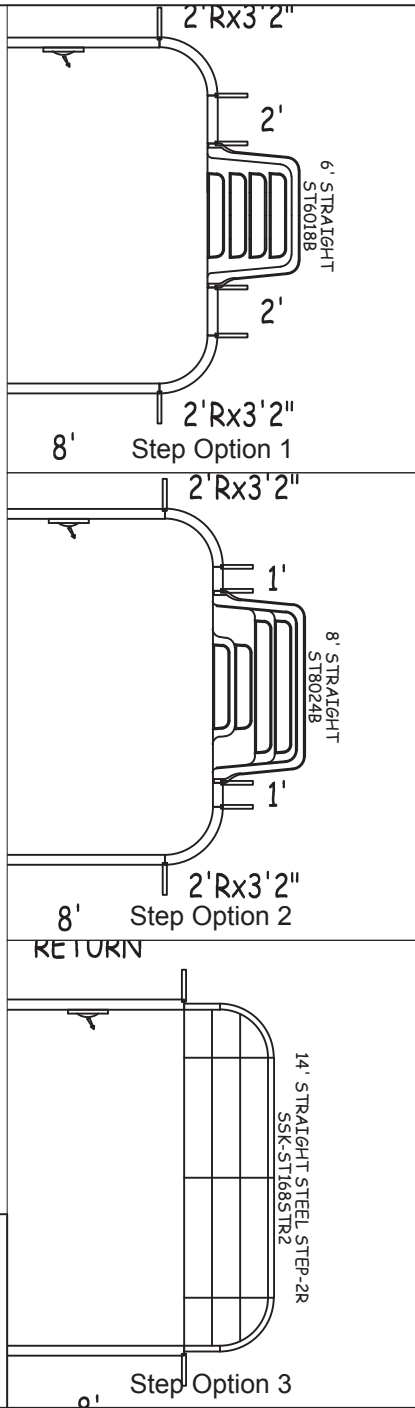
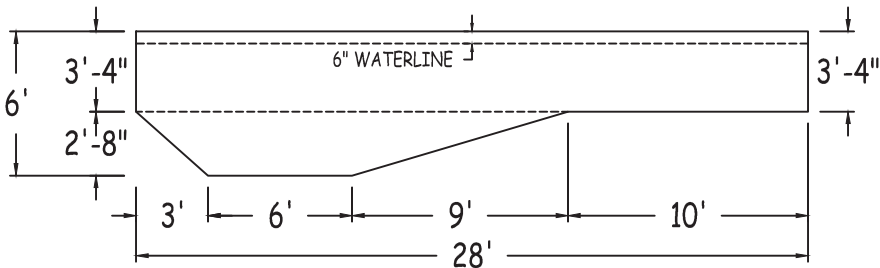
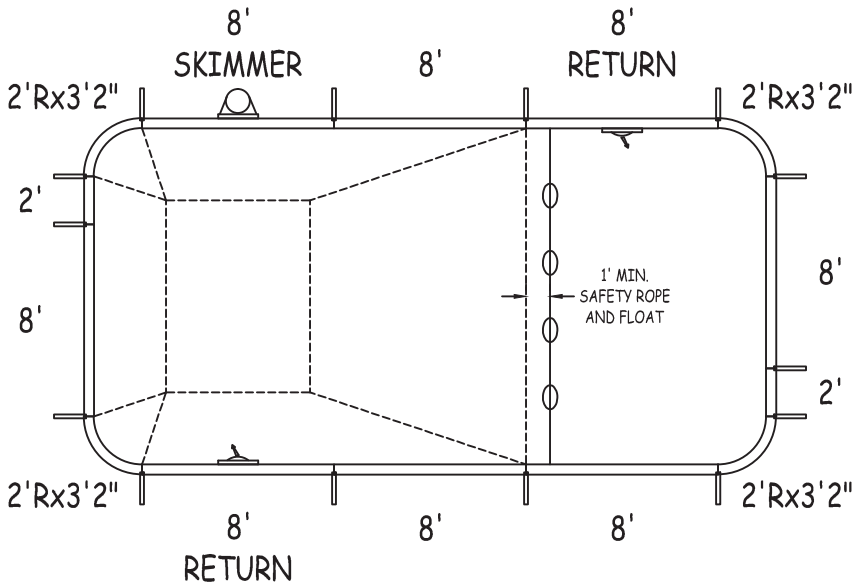


IN ACCORDANCE WITH ANSI/APSP/ICC-5 2011, THE INSTALLER IS RESPONSIBLE FOR PLACING ONE SKIMMER FOR EVERY 800 SQUARE FEET OF SURFACE AREA AND ONE RETURN FOR EVERY 300 SQUARE FEET OF SURFACE AREA.

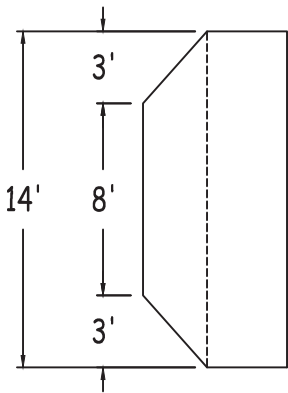

**LATHAM STEEL**

**RECTANGLE-2FT RAD 14-0 x 28-0**

42" STEEL PANELS	PERIMETER:	80'-8"	VOLUME (US Gal):	10800
DWG#:	SURFACE (ft²):	389	VOLUME (Liters):	40900
LSRE24S1428-15	LINER (ft²):	392	DATE:	1/1/2015
KIT#:	COVER (ft²):	480	DSR:	144
RE24S1428	SCALE:	1/8" = 1'-0"		



**NON-DIVING POOL**

USE OF DIVING EQUIPMENT IS PROHIBITED

**RECTANGLE-2FT RAD**

SHEET: 1 OF 2

Diagram of a vertical pipe of length  $h$ . A horizontal force  $B$  is applied at the top. A curved arrow indicates a counter-clockwise moment.

